

CERTIFICATE OF ANALYSIS

U-[13C34]-Fumonisin B3 in Acetonitrile/Water (50/50) LCMS grade

The certified values and uncertainty are determined in accordance with NF ISO 33401, ISO 17034, ISO/IEC 17025, ISO33405, ISO TR 16476 and JCGM 100.

Description of the standard

Product name:	U-[13C34]-Fumonisin B3				
Product number:	FIA000142				
CAS number:	U-[13C34]-Fumonisin B3	1217494-88-6			
Lot number:	FB313C18120401				
Expiry date:	19-Nov-2026				
Certified value (s):	U-[13C34]-Fumonisin B3	10,01	±	0,56	µg/mL
Isotope incorporation by mass spectrometry 13C/Molecule	U-[13C34]-Fumonisin B3 98,6%				
Physical description:	Clear solution of toxin in Acetonitrile/Water (50/50) LCMS grade				
Packing	Amber glass vial filled with 5 mL of solution				
Storage conditions	2-8°C				
Matrix and starting material:	This material was prepared with/from:				
	Acetonitrile LCMS Grade			Batch:	P3E505053E
	U-13C34]-Fumonisin B3			Internal ID:	SS-FB313C-17052401

Intended use of the standard:

For laboratory use only. Not for drug, household or other uses. The main purpose of this material is :

- Demonstrate mastery of a measurement process within a laboratory over a given period;
- Check the performance of the instrument;
- Repeatability and reproducibility studies: repeated use over a long period of time, instruments, operators, etc., to estimate the long-term reproducibility or robustness of a measuring process or that of a laboratory;
- Confirm the degree of equivalence of measurement results from at least two laboratories (e.g. supplier and user);
- Check variability due to the operator;
- Study the impact of any variation in environmental conditions (e.g. temperature, humidity).

Instruction for the correct use of the standard:

The vial should be stored in a dark place at 2-8°C. Before usage of the standard, allow the vial to warm to room temperature. If condensation is present on the bottle, the bottle should be wiped before opening. Homogenization can be done by vortexing for at least 10 seconds. There is no indication as to the vortex speed, but the vortex must be visible to the user. The bottle should not be left open on the bench, it should be opened only to take the necessary quantity and immediately closed. The expiry date of this standard is based on the current knowledge and holds only for proper storage conditions in the originally closed vials / packages.

Hazardous situation:

H225 : Flammable liquid - Category 2 - Highly flammable liquid and vapour

H302 : Acute toxicity - Oral - Category 4 - Harmful if swallowed

H319 : Eye irritation - Category 2 - Causes serious eye irritation

In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible). Avoid exposure. Wear suitable protective clothing.

Safety measures:

Special care must be taken when manipulating this standard. Avoid contact with eyes, skin and clothing. Avoid prolonged or repeated exposure. Use in a chemical fume hood. Safety shower and eye bath must be near. In case of spills, cover and absorb with an inert dry material such as dry-lime, sand or soda ash and place in an appropriate waste disposal container.

Keep container tightly closed. Do not store in direct sunlight. Keep away from heat, sparks, flame and incompatible material. Storage area should be cool, dry and away from incompatible materials.

Final users should conduct their own investigations to determine the suitability of the information for their particular research purposes. Under no circumstances will the supplier of this standard be held responsible for any damage resulting from handling or contact with the product.

More information are available on the SDS online on www.fianovis.com/documentation.

Commutability

As part of the standards produced by Fianovis, the property values are guaranteed for chromatography analysis. For another use, the user must make additional qualification to use it in this context.

Traceability

The values are based on the chromatographic detestandardination of the concentration of the stock solution. The chromatographic assay method was demonstrated to be selective through validation of the analytical method. Pipette calibration is verified by an accredited external calibration service. Production is carried out with specially dedicated glassware. Only Class A glassware is used for volumetric measurements.

Calculation of certified values and associated uncertainties

This calibrant is certified on solution preparation. Mass concentration calculation is based on certified concentration and dilution step. Toxin is pipetted and diluted in Acetonitrile/Water (50/50) LCMS grade.

$$C (\mu\text{g/mL}) = \frac{C_{ss} \times V_p}{V_D}$$

Toxin	Source				Standard uncertainty
U-[13C34]-Fumonisin B3	Liquid solution C _{ss}	concentration	62,54	μg/mL	1,39
	Volumetry procedure V _p	volume	3,17	mL	0,00
	Dilution V _D	volume	19,77	mL	0,11
$\text{Combined}_u = \sqrt{\left(\frac{u_{C_{ss}}}{V_{C_{ss}}}\right)^2 + \left(\frac{u_{V_p}}{V_p}\right)^2 + \left(\frac{u_{V_D}}{V_D}\right)^2}$					0,03
$\text{Concentration}_{\text{Toxin}} = \frac{\text{Concentration stock solution}}{V_D} \quad \mu\text{g/mL}$					10,01
Total expanded uncertainty (using a coverage factor k=2)					0,56

Notes: The purity of the mycotoxin used for this standard was detestandardined by liquid chromatography. Following the Guide to the Expression of Uncertainty in measurement (GUM) the expanded uncertainty of toxin level is obtained by multiplication with a coverage factor K for which 2 is usually chosen to obtain a confidence level of 95 %.

Carbon 13 calculation

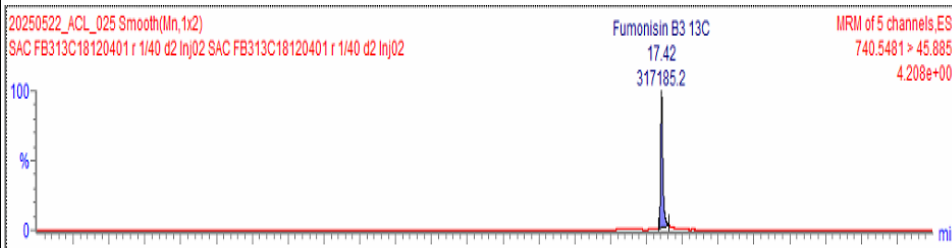
Isotopic incorporation	
Compound	Isotopic distribution
¹³ C ₃₃ Fumonisin B3	38,8%
¹³ C ₃₄ Fumonisin B3	61,2%
Calculated isotopic incorporation (¹³C/molecule)	98,6%

The calculation are based on LC-MS/MS data

Quality control

Confirmation of the certified concentration by LC-MS/MS

The certified concentrations of the prepared solution was confistandardized by LC-MS/MS against a reference batch.

Chromatographic conditions					Chromatogram of Toxins	
Column :	Acquity UPLC HSS T3 100 x 2,1 mm 1,8 μm				<div><div>20250522_ACL_025 Smooth(Mn,1x2)</div><div>SAC FB313C18120401 r 1/40 d2 lnj02 SAC FB313C18120401 r 1/40 d2 lnj02</div><div><div><div>17.42</div><div>317185.2</div></div><div>Fumonisin B3 13C</div><div>MRM of 5 channels, ES+ 740.5481 > 45.8855 4.208e+006</div></div><div></div></div>	
Mobile phase :	MeOH / H2O + 0,1% formic acid + 5mM ammonium acetate / Gradient					
Flow (mL/min) :	0,30					
Temperature (°C) :	35,00					
Detector :	MS/MS					
U-[13C34]-Fumonisin B3	9,84	±	0,41	μg/mL		
Mean of 6 replicates measurement against reference batch, confidence interval with P = 95%						

References:

- NF ISO 33401 (2024), Reference Materials - Contents of certificates, labels and accompanying documentation.
- ISO 17034 (2016) General requirements for the competence of reference material producers.
- ISO/IEC 17025 (2017) General requirements for the competence of testing and calibration laboratories.
- ISO 33405 (2024), Reference Materials - Approaches for characterization and assessment of homogeneity and stability.
- ISO TR 16476 (2016) Reference Materials – Establishing and expressing metrological traceability of quantity values assigned to reference materials.
- JCGM 100(2008) (E) – Evaluation of measurement data - Guide to the expression of uncertainty in measurement.

Control and Certification

Edited by: Quality Control department
CLERMONT Alexandre

Release by: Quality Assurance department
Anaïs ACHILLE

Date: 26-May-2025

