


**CERTIFICATE OF ANALYSIS**

**U-[13C17]-Aflatoxins B1, B2, G1, G2 Mixture in Acetonitrile LCMS grade**

The certified values and uncertainty are determined in accordance with NF ISO 33401, ISO 17034, ISO/IEC 17025, ISO33405, ISO TR 16476 and JCGM 100.

**Description of the standard**

	<b>Product name:</b>	U-[13C17]-Aflatoxins B1, B2, G1, G2 Mixture			
	<b>Product number:</b>	FIA000126			
	<b>CAS number:</b>	U-[13C17]-Aflatoxin B1	1217449-45-0		
		U-[13C17]-Aflatoxin B2	1217470-98-8		
		U-[13C17]-Aflatoxin G1	1217444-07-9		
		U-[13C17]-Aflatoxin G2	1217462-49-1		
	<b>Batch:</b>	AFBG13C20051101			
	<b>Expiry date:</b>	10-May-2029			
	<b>Certified value (s):</b>	U-[13C17]-Aflatoxin B1	0,50 ± 0,02	µg/mL	
		U-[13C17]-Aflatoxin B2	0,50 ± 0,02	µg/mL	
		U-[13C17]-Aflatoxin G1	0,51 ± 0,02	µg/mL	
		U-[13C17]-Aflatoxin G2	0,50 ± 0,01	µg/mL	
	<b>Isotope incorporation by mass spectrometry</b>	U-[13C17]-Aflatoxin B1	99,9%		
		U-[13C17]-Aflatoxin B2	99,5%		
		U-[13C17]-Aflatoxin G1	99,3%		
U-[13C17]-Aflatoxin G2		100,0%			
<b><sup>13</sup>C/Molecule</b>					
<b>Physical description:</b>	Clear solution of toxins mixture in Acetonitrile LCMS grade				
<b>Packaging</b>	Amber glass vial filled with 5 mL				
<b>Storage conditions</b>	≤ -10°C				
<b>Matrix and starting material:</b>	This material was prepared with/from:				
	Acetonitrile LCMS Grade		Batch:	P4N670234N	
	U-[13C17]-Aflatoxin B1		Internal ID:	SS-AFB113C-19072301	
	U-[13C17]-Aflatoxin B2		Internal ID:	SS-AFB213C-19072901	
	U-[13C17]-Aflatoxin G1		Internal ID:	SS-AFG113C-19073101	
U-[13C17]-Aflatoxin G2		Internal ID:	SS-AFG213C-19073101		

**Intended use of the standard:**

For laboratory use only. Not for drug, household or other uses. The main purpose of this material is :

- Demonstrate mastery of a measurement process within a laboratory over a given period;
- Check the performance of the instrument;
- Repeatability and reproducibility studies: repeated use over a long period of time, instruments, operators, etc., to estimate the long-term reproducibility or robustness of a measuring process or that of a laboratory;
- Confirm the degree of equivalence of measurement results from at least two laboratories (e.g. supplier and user);
- Check variability due to the operator;
- Study the impact of any variation in environmental conditions (e.g. temperature, humidity).

**Instruction for the correct use of the standard:**

The vial should be stored in a dark place at ≤ -10°C . Before usage of the standard, allow the vial to warm to room temperature. If condensation is present on the bottle, the bottle should be wiped before opening. Homogenization can be done by vortexing for at least 10 seconds. There is no indication as to the vortex speed, but the vortex must be visible to the user. The bottle should not be left open on the bench, it should be opened only to take the necessary quantity and immediately closed. The expiry date of this standard is based on the current knowledge and holds only for proper storage conditions in the originally closed vials / packages.

**Hazardous situation:**

- H225 : Flammable liquid - Category 2 - Highly flammable liquid and vapour
- H302 : Acute toxicity - Oral - Category 4 - Harmful if swallowed
- H312 : Acute toxicity - Dermal - Category 4 - Harmful in contact with skin
- H319 : Eye irritation - Category 2 - Causes serious eye irritation
- H332 : Acute toxicity - Inhalation - Category 4 - Harmful if inhaled

In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible). Avoid exposure. Wear suitable protective clothing.

### Safety measures:

Special care must be taken when manipulating this standard. Avoid contact with eyes, skin and clothing. Avoid prolonged or repeated exposure. Use in a chemical fume hood. Safety shower and eye bath must be near. In case of spills, cover and absorb with an inert dry material such as dry-lime, sand or soda ash and place in an appropriate waste disposal container.

Keep container tightly closed. Do not store in direct sunlight. Keep away from heat, sparks, flame and incompatible material. Storage area should be cool, dry and away from incompatible materials.

Final users should conduct their own investigations to determine the suitability of the information for their particular research purposes. Under no circumstances will the supplier of this standard be held responsible for any damage resulting from handling or contact with the product.

More information are available on the SDS online on [www.fianovis.com/documentation](http://www.fianovis.com/documentation).

### Commutability

As part of the standards produced by Fianovis, the property values are guaranteed for chromatography analysis. For another use, the user must make additional qualification to use it in this context.

### Traceability

The values are based on the chromatographic determination of the concentration of the stock solution. The chromatographic assay method was demonstrated to be selective through validation of the analytical method. Pipette calibration is verified by an accredited external calibration service. Production is carried out with specially dedicated glassware. Only Class A glassware is used for volumetric measurements.

### Calculation of certified values and associated uncertainties

This calibrant is certified on solution preparation. Mass concentration calculation is based on certified concentration and dilution step. Toxin is pipetted and diluted in Acetonitrile LCMS grade.

$$C (\mu\text{g/mL}) = \frac{C_{\text{SS}} \times V_p}{V_D}$$

Toxin	Source				Standard uncertainty
U-[13C17]-Aflatoxin B1	Liquid solution C <sub>SS</sub>	concentration	438,75	μg/mL	3,82
	Volumetry procedure V <sub>p</sub>	volume	0,91	mL	0,02
	Dilution V <sub>D</sub>	volume	800,00	mL	0,10
$\text{Combined}_u = \sqrt{\left(\frac{u_{C_{\text{SS}}}}{V_{C_{\text{SS}}}}\right)^2 + \left(\frac{u_{V_p}}{V_p}\right)^2 + \left(\frac{u_{V_D}}{V_D}\right)^2}$					0,02
$\text{Concentration}_{\text{Toxin}} = \frac{\text{Concentration stock solution} \times V_p}{V_D} \mu\text{g/mL}$					0,01
Total expanded uncertainty (using a coverage factor k=2)					0,02

Toxin	Source				Standard uncertainty
U-[13C17]-Aflatoxin B2	Liquid solution C <sub>SS</sub>	concentration	478,43	μg/mL	4,39
	Volumetry procedure V <sub>p</sub>	volume	0,84	mL	0,01
	Dilution V <sub>D</sub>	volume	800,00	mL	0,10
$\text{Combined}_u = \sqrt{\left(\frac{u_{C_{\text{SS}}}}{V_{C_{\text{SS}}}}\right)^2 + \left(\frac{u_{V_p}}{V_p}\right)^2 + \left(\frac{u_{V_D}}{V_D}\right)^2}$					0,02
$\text{Concentration}_{\text{Toxin}} = \frac{\text{Concentration stock solution} \times V_p}{V_D} \mu\text{g/mL}$					0,01
Total expanded uncertainty (using a coverage factor k=2)					0,02

Toxin	Source				Standard uncertainty
U-[13C17]-Aflatoxin G1	Liquid solution C <sub>ss</sub>	concentration	340,03	µg/mL	1,81
	Volumetry procedure V <sub>p</sub>	volume	1,19	mL	0,02
	Dilution V <sub>D</sub>	volume	800,00	mL	0,10
$Combined_{u_c} = \sqrt{\left(\frac{u_{C_{ss}}}{V_{C_{ss}}}\right)^2 + \left(\frac{u_{V_p}}{V_p}\right)^2 + \left(\frac{u_{V_D}}{V_D}\right)^2}$					0,02
$Concentration_{Toxin} = \frac{Concentration\ stock\ solution \times V_p}{V_D} \mu\text{g/mL}$					0,01
Total expanded uncertainty (using a coverage factor k=2)					0,02

Toxin	Source				Standard uncertainty
U-[13C17]-Aflatoxin G2	Liquid solution C <sub>ss</sub>	concentration	388,76	µg/mL	1,94
	Volumetry procedure V <sub>p</sub>	volume	1,03	mL	0,01
	Dilution V <sub>D</sub>	volume	800,00	mL	0,10
$Combined_{u_c} = \sqrt{\left(\frac{u_{C_{ss}}}{V_{C_{ss}}}\right)^2 + \left(\frac{u_{V_p}}{V_p}\right)^2 + \left(\frac{u_{V_D}}{V_D}\right)^2}$					0,01
$Concentration_{Toxin} = \frac{Concentration\ stock\ solution \times V_p}{V_D} \mu\text{g/mL}$					0,01
Total expanded uncertainty (using a coverage factor k=2)					0,01

Notes: The purity of the mycotoxin used for this RM was determined by liquid chromatography. Following the Guide to the Expression of Uncertainty in measurement (GUM) the expanded uncertainty of toxin level is obtained by multiplication with a coverage factor K for which 2 is usually chosen to obtain a confidence level of 95 %.

### Carbon 13 calculation

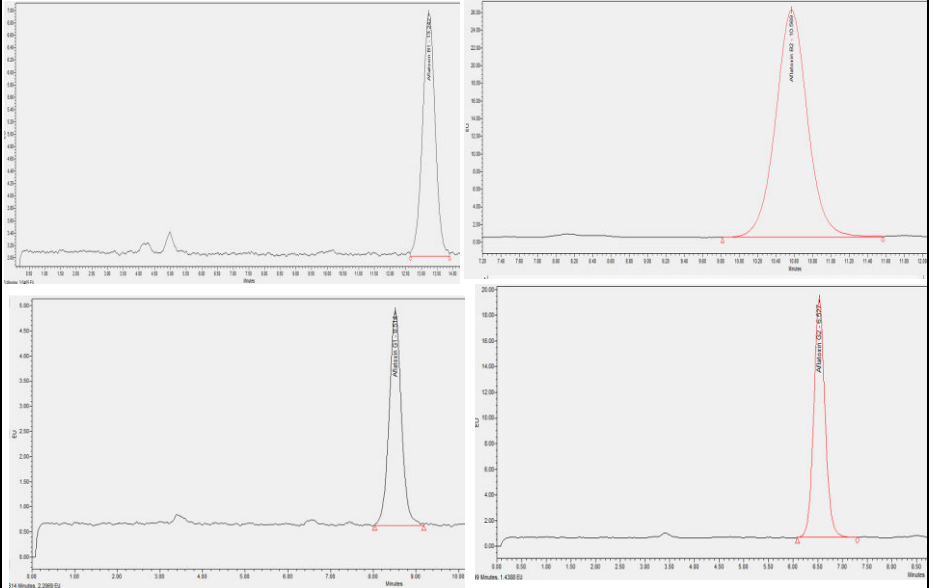
Isotopic incorporation			
Compound	Isotopic distribution	Compound	Isotopic distribution
<sup>13</sup> C <sub>14</sub> Aflatoxin B1	0,0%	<sup>13</sup> C <sub>14</sub> Aflatoxin B2	0,0%
<sup>13</sup> C <sub>15</sub> Aflatoxin B1	0,0%	<sup>13</sup> C <sub>15</sub> Aflatoxin B2	0,3%
<sup>13</sup> C <sub>16</sub> Aflatoxin B1	2,3%	<sup>13</sup> C <sub>16</sub> Aflatoxin B2	0,3%
<sup>13</sup> C <sub>17</sub> Aflatoxin B1	97,7%	<sup>13</sup> C <sub>17</sub> Aflatoxin B2	8,1%
<b>Calculated isotopic incorporation (<sup>13</sup>C/molecule)</b>	99,9%	<b>Calculated isotopic incorporation (<sup>13</sup>C/molecule)</b>	99,5%

Isotopic incorporation			
Compound	Isotopic distribution	Compound	Isotopic distribution
<sup>13</sup> C <sub>14</sub> Aflatoxin G1	0,0%	<sup>13</sup> C <sub>14</sub> Aflatoxin G2	0,0%
<sup>13</sup> C <sub>15</sub> Aflatoxin G1	0,5%	<sup>13</sup> C <sub>15</sub> Aflatoxin G2	0,1%
<sup>13</sup> C <sub>16</sub> Aflatoxin G1	11,1%	<sup>13</sup> C <sub>16</sub> Aflatoxin G2	0,1%
<sup>13</sup> C <sub>17</sub> Aflatoxin G1	88,4%	<sup>13</sup> C <sub>17</sub> Aflatoxin G2	99,8%
<b>Calculated isotopic incorporation (<sup>13</sup>C/molecule)</b>	99,3%	<b>Calculated isotopic incorporation (<sup>13</sup>C/molecule)</b>	100,0%

The calculation are based on LC-MS/MS data

**Quality control**
**Confirmation of the certified concentration by HPLC-FLD**

The certified concentrations of the prepared solution was confirmed by HPLC-FLD against a reference batch.

Chromatographic conditions		Chromatogram of Toxins			
Column :	InertSustain C18 250 x 4,6 mm 5 µm				
Mobile phase :	MeOH / H2O + 10mM ammonium acetate + 0,1% formic acid / Isocratic : 35%A / 65%B				
Flow (mL/min) :	1,80				
Temperature (°C) :	50,00				
Detector :	FLD				
U-[13C17]-Aflatoxin B1	0,50	±	0,03	µg/mL	
U-[13C17]-Aflatoxin B2	0,51	±	0,01	µg/mL	
U-[13C17]-Aflatoxin G1	0,54	±	0,01	µg/mL	
U-[13C17]-Aflatoxin G2	0,50	±	0,01	µg/mL	
Mean of 6 replicates measurement against reference batch, confidence interval with P = 95%					

**References:**

- NF ISO 33401 (2024), Reference Materials - Contents of certificates, labels and accompanying documentation.
- ISO 17034 (2016) General requirements for the competence of reference material producers.
- ISO/IEC 17025 (2017) General requirements for the competence of testing and calibration laboratories.
- ISO 33405 (2024), Reference Materials - Approaches for characterization and assessment of homogeneity and stability.
- ISO TR 16476 (2016) Reference Materials – Establishing and expressing metrological traceability of quantity values assigned to reference materials.
- JCGM 100(2008) (E) – Evaluation of measurement data - Guide to the expression of uncertainty in measurement.

**Control and Certification**

 Edited by: Quality Control department  
 BUTHION Alicia

 Release by: Manufacturing, R&D & Quality Director  
 Jean-Michel HENRY

Date: 27 MAY 2026

